

# OT-3

5915024 JUL 2017

## MANUFACTURER'S STATEMENT


1. Only use this product as specified in the operation manual provided.
2. Do not wash the product with water.
3. Do not disassemble, rebuild or repair the product yourself, otherwise electric shock may occur.
4. Do not use the product for safety / emergency switch.

## SPECIFICATIONS

Model	: OT-3
Cover color	: Silver (Aluminium)
Output	: Normally open 24VDC Max. 5mA / 15VDC Max. 20mA (resistance load)
IP rate	: IP 55
Weight	: 90g(3.2oz)
Accessories	: 2 Mounting screws, 1 Mounting template, 1 Operation manual


**NOTE** The specifications herein are subject to change without prior notice due to improvements.

## OUTER DIMENSIONS

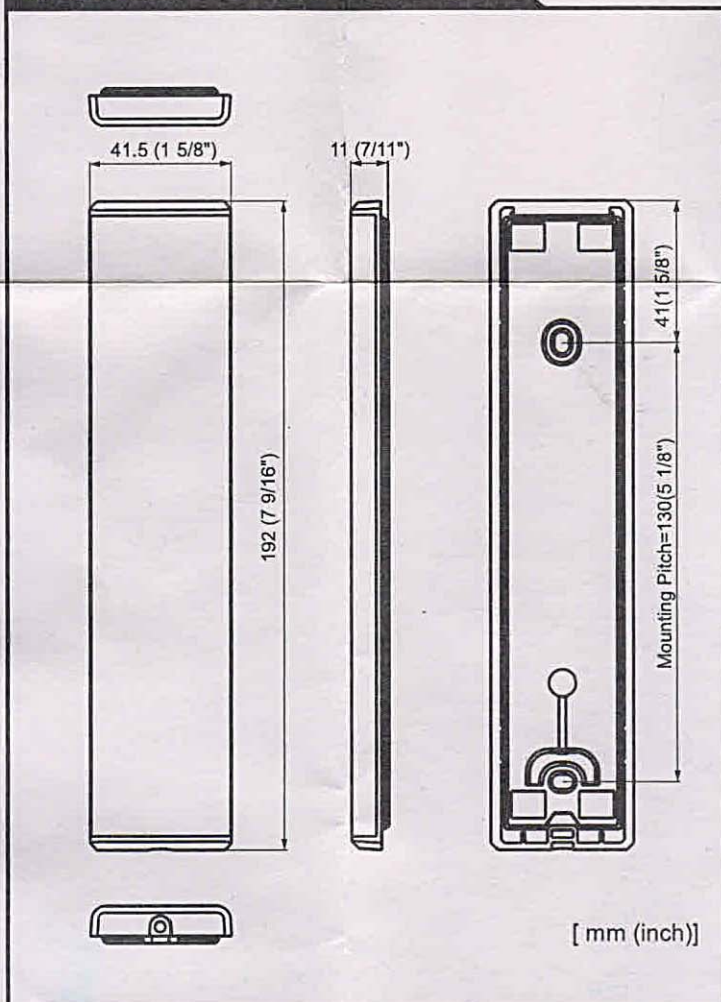

## INSTALLATION

1. Drill two mounting holes of  $\varnothing 3.4\text{mm}$  ( $\varnothing 1/8"$ ).
2. If wiring is to be concealed, drill a distribution hole of  $\varnothing 5\text{mm}$  ( $\varnothing 3/16"$ ).
3. Remove the cover and fix the push button with the screws.
4. Put back the cover on the push button.
5. Attach the cover with the screw.

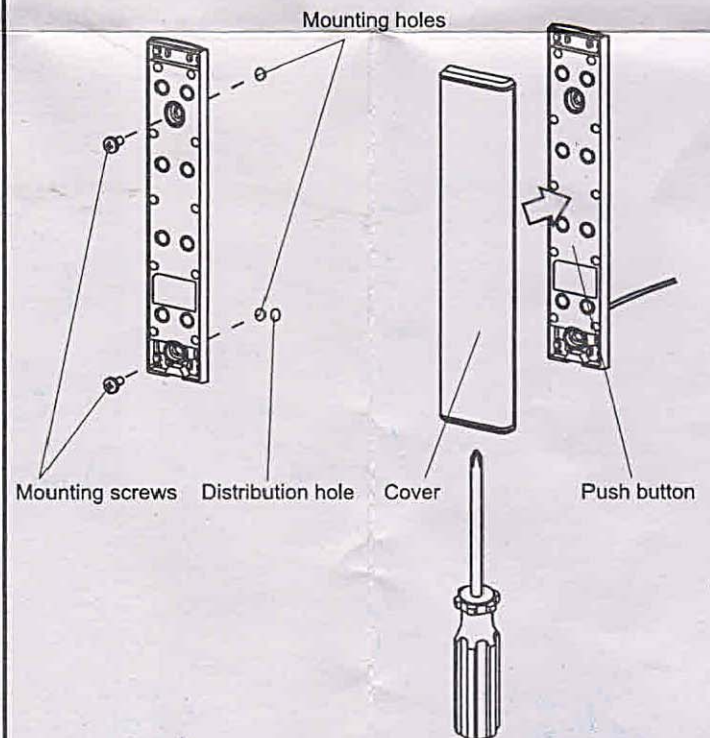

### Manufacturer

#### OPTEX CO., LTD.

5-8-12 Ogoto Otsu 520-0101, Japan  
 TEL.: +81(0)77 579 8700 FAX.: +81(0)77 579 7030  
 WEBSITE: www.optex.net

### North and South America Subsidiary

#### OPTEX INCORPORATED

18730 S. Wilmington Avenue, Suite 100 Rancho Dominguez CA 90220 U.S.A.  
 TEL.: +1-800-877-6656 FAX.: +1(310)898-1098  
 WEBSITE: www.ot-inc.com

### European Subsidiary

#### OPTEX Technologies B.V.

Henricuskade 17, 2497 NB The Hague, The Netherlands  
 TEL.: +31(0)70 419 41 00 FAX.: +31(0)70 317 73 21  
 E-MAIL: info@optex.eu WEBSITE: www.optex.eu

### East coast office

8510 McAlpines Park Drive, Suite 108  
 Charlotte, NC 28211 U.S.A.  
 TEL.: +1-800-877-6656 FAX.: +1(704)365-0818  
 WEBSITE: www.ot-inc.com